

i³CX Intelligent Control Station


- 640 x 480 colour touch display
- High resolution resistive touch screen
- Addressable function keys
- Real time clock
- Built-in Ethernet
- 3 x communications ports (RS 232 / RS 485)
- 1 x USB A, 1 x USB mini B
- 10 - 30 VDC power supply
- 1MB RAM (program), 27MB (Graphical)
- Free configuration software
- IP65 (NEMA4)
- Remote I/O communication
- Optional: MicroSD (up to 32GB)
Modem (SMS, GSM, GPRS)
USB drive up to 2TB



Options & Ordering Codes

Standard Options	DI	DO	AI	AO
i3CX12Z/10D03-SEHF	12	6 Relay	4	-
i3CX12Z/13C14-SEHF	12	12	2*	2
i3CX12C/20B05-SEHF	24	16	4	-
i3CX12Z/10B04-SEHF	12	12	2	-
i3CX12Z/10E24-SEHF	12	12	6*	4
i3CX12Z/00000-SEHF	-	-	-	-

* Universal Analog Inputs

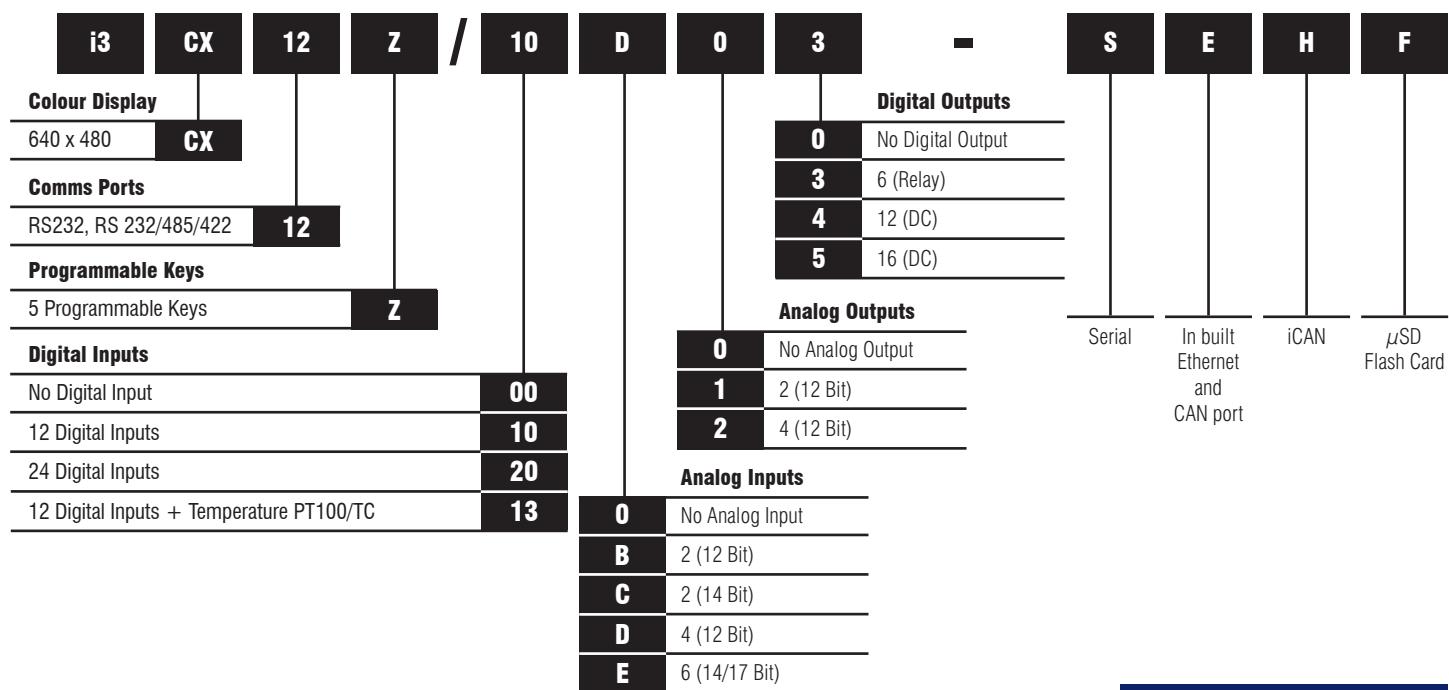


*³*CX Intelligent Control Station

Technical Specifications


General Specifications																	
Required Power (Steady State)		420mA @ 12VDC / 230mA @ 24VDC															
Required Power (Inrush)		25A for <1ms @ 24VDC DC Switched															
Primary Power Range																	
10-30VDC																	
Relative Humidity																	
5 to 95% Non-Condensing																	
Clock Accuracy		+/-20ppm Maximum at 25°C (+/-1 Minute per month)															
Operating Air Temperature		-10°C to +60°C															
Storage Temperature		-40°C to +60°C															
Weight		1.98kg / 4.375 lbs (without I/O)															
Approvals		UL, CE															
Control & Logic Specifications																	
Control Language Support		Advanced Ladder Logic Full IEC 61131-3															
Logic Program Size & Logic Scan Rate		1MB Maximum 0.013ms/k															
Online Programming Changes		Supported in Advanced Ladder															
I/O Support		Digital Inputs - 2048															
		Digital Outputs - 2048															
		Analog Inputs - 512															
		Analog Outputs - 512															
General Purpose Registers		50,000 (words) Retentive 16,384 (bits) Retentive 16,384 (bits) Non-retentive															
Display Specifications																	
Display Type		5.7" VGA TFT (450 nit typical)															
Resolution		640 x 480															
Colour		16-bit (65,536)															
Screen Memory		27MB															
User-Programmable Screens		1023															
Backlight		LED - 30,000 hour life															
Screen Update Rate		User configurable within the scan time. (perceived as instantaneous in many cases)															
Connectivity																	
Serial Ports		1 RS-232 & 1 RS-485 on first modular jack (MJ1/2) 1 RS-232 or 1 RS-485 on second Modular Jack (MJ3)															
USB mini-B		USB 2.0 (480MHz) Programming & Data Access															
USB A		USB 2.0 (480MHz) for USB FLASH Drives (up to 2TB)															
CAN		Remote I/O, Peer-to-Peer Comms, i3 Configurator															
Ethernet		10/100MB (Auto-MDX), Modbus TCP, HTTP, FTP, SMTP, i3 Configurator, Ethernet IP															
Remote I/O		iOS, Smart IO, iSmart															
Removable Memory		MicroSD (support for 32GB max) Application updates, Datalogging, more															
Input / Output Specifications																	
Model	DC In	DC Out	Relays	HS In	HS Out	mA/V In	mA/V RTD/TC	mA/V Out	High Speed Counters								
10D03	12		6	4		4			Number of Counters 2								
10B04	12	12		4	2	2			Maximum Frequency 500kHz each								
20B05	24	16		4	2	2			Accumulator Size 32-bits each								
13C14	12	12		4	2		2	2	Modes Supported								
10E24	12	12		4	2		6*	4*	Totalizer Quadrature								
There are 4 high-speed inputs of the total DC inputs. There are 2 high-speed outputs of the total DC outputs. Model 10D03, 10B04, 20B05 feature 12-bit analog I/O. Model 13C14 features 14/16-bit analog I/O. High-speed outputs can be used for PWM and Pulse Train Outputs, currently limited to <65kHz. Model 10E14 features a 14/17 bit analog I/O																	
*Up to six mA/V In, RTD/TC, and mA/V Out																	
Pulse Measurement Frequency Measurement																	
2 Position Controlled Outputs 1 ON/OFF Setpoint per Output																	

Dimensions & Panel Cutout

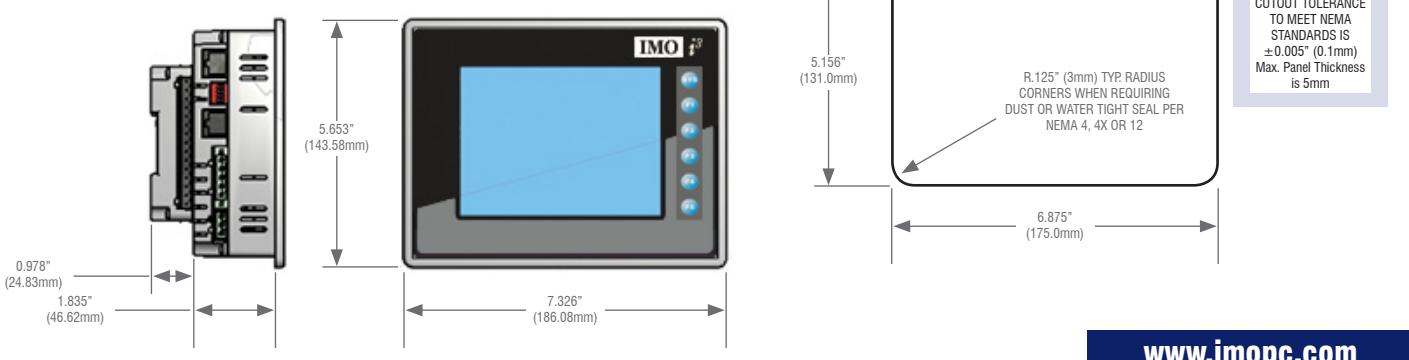

*³*CX Intelligent Control Station

Ports & Connectors



DC Input / Frame

Torque rating: 4.5-7 Lb-in
(0.50-0.78Nm)


DC- is internally connected to I/O V-,
but is isolated from CAN V-
A Class 2 power supply must be used



CAN

Locking Spring-Clamp
2-Terminators Per Conductor
Mounting screw torque rating: 4.5 Lb-in
(0.50Nm)
SHLD and V+ pins are not
internally connected to i3CX

Primary Power Port Pins		
Pin	Signal	Signal Description
1	Ground	Frame Ground
2	DC-	Input Power Supply Ground
3	DC+	Input Power Supply Voltage




MJ1/2 Independent Serial Ports

MJ1: RS-232 w/Full Handshaking
MJ2: RS-485 Half-Duplex


PIN	MJ1 PINS		MJ2 PINS	
	Signal	Direction	Signal	Direction
8	TXD	OUT	-	-
7	RXD	IN	-	-
6	0 V	Ground	0 V	Ground
5	+5V@60mA	OUT	+5V@60mA	OUT
4	RTS	OUT	-	-
3	CTS	IN	-	-
2	-	-	RX- / TX-	IN / OUT
1	-	-	RX+ / TX+	IN / OUT

DIP Switches

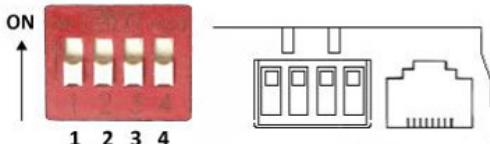

Switch	Name	Function	Default
1	MJ3 RS485 Termination	ON = Terminated	OFF
2	MJ3 Duplex	ON = Half	OFF
3		OFF = Full	
4	MJ3 RS485 Termination	ON = Terminated	OFF

Primary Power Port Pins			
Pin	Signal	Description	Direction
1	V-	CAN Ground - Black	-
2	CN L	CAN Data Low - Blue	IN / OUT
3	SHLD	Shield Ground - None	-
4	CN H	CAN Data High - White	IN / OUT
5	V+ (NC)	No Connect - Red	-



MJ3 Serial Port

2 multiplexed Serial Ports on One
Modular Jack (8posn)

PIN	MJ3 PINS	
	Signal	Direction
8	TXD RS232	OUT
7	RXD RS232	IN
6	0 V	Ground
5	+5V@60mA	OUT
4	TX- RS485	OUT
3	TX+ RS485	OUT
2	RX- RS485	IN
1	RX+ RS485	IN

Built-in I/O

I/O is mapped into i3 Register space, in three separate areas
– Digital/Analog I/O, High-Speed Counter I/O, and High-Speed
Output I/O. Digital/Analog I/O location is fixed starting at 1, but the
High-Speed Counter and High-Speed Output references may be
mapped to any open register location. For more details on using
the High-Speed Counter and High-Speed Outputs, see the i3CX
User's Manual.

Fixed Address	Digital/Analog I/O Function	i3CX Model				
		10D03	10B04	20B05	13C14	10E14
%I1	Digital Inputs	1-12	1-12	1-24	1-12	1-12
	Reserved	13-32	13-31	25-31	13-31	13-31
	ESCP Alarm	n/a	32	32	32	32
%Q1	Digital Outputs	1-6	1-12	1-16	1-12	1-12
	Reserved	7-24	13-24	17-24	13-24	13-24
%AI1	Analog Inputs	1-4	1-2	1-2	1-2	1-4:33-38
	Reserved	5-12	3-12	3-12	3-12	n/a
%AQ1	Reserved	n/a	1-8	1-8	1-8	1-12
	Analog Outputs	n/a	n/a	n/a	9-10	n/a

Reserved areas maintain backward compatibility with other i3 Controller models

Default Address*	High Speed Counter Function	i3CX Models
%I1601	Status Bits	1-8
&Q1601	Command Bits	1-32
%AI0401	Accumulator 1&2	1-8
%AQ0401	Preload & Match Values	1-12

*Starting Address locations for
%I, %Q, %AI & %AQ may
be re-mapped by user

Default Address*	High Speed Output Function	i3CX Models
%I1617	Status Bits	1-8
&Q1617	Command Bits	1-32
n/a	n/a	n/a
%AQ0421	PWM or Pulse Train Parameters	1-20


*Starting Address locations for
%I & %AQ may be re-mapped by user
**Q1-Q2 are part of the Fixed I/O Map. In High
Speed Output mode they can be used to initiate a
Stepper/PTO Move

*i*³CX Intelligent Control Station


10D03 I/O Board Specifications

Digital DC Inputs			Digital Relay Outputs	
Inputs per Module		12 including 4 configurable HSC inputs	Outputs per Module	
Commons per Module		1	Commons per Module	
Input Voltage Range		10-30 VDC	Max Switching Current per Relay	
Absolute Max Voltage		35 VDC Max	Max Total Output Current	
Input Impedance		10 kΩ	Max Switching Voltage	
Input Current	Positive Logic	Negative Logic	6 Relay	
	0.8mA	-1.6mA	6	
	0.3mA	-2.1mA	Max Switched Power	
Max Upper Threshold		8 VDC	1250 VAC, 150W	
Max Lower Threshold		3 VDC	Contact Isolation to Ground	
OFF to ON Response		1 ms	1000 VAC	
ON to OFF Response		1 ms	Max Voltage Drop at Rated Current	
HSC Max Switching Rate		10 kHz Totalizer/Pulse, Edges 5 kHz Frequency/Pulse, Width 2.5 kHz Quadrature	0.5V	
Number of Channels		4	Expected Life (see below for detail)	
Safe Input Voltage Range		-0.5V to 12V	No Load: 5,000,000 200,000 at rated load	
Nominal Resolution		10 Bits	Max Switching Rate	
Max Over Current		35 mA	300 CPM at no load 20 CPM at rated load	
Max Error at 25°C (excluding zero)		4-20 mA 1.00% of FS 0-20 mA 1.00% of FS 0-10 VDC 1.50% of FS	Type	Mechanical Contact
Adjusting filtering may tighten			Response Time	One update per ladder scan plus 10ms
Analog Inputs, Medium Resolution				
Number of Channels		4	Input Ranges	
Safe Input Voltage Range		-0.5V to 12V	Input Impedance (clamped @ -0.5VDC to 12VDC)	Current Mode: 100 Ω Voltage Mode: 500 kΩ
Nominal Resolution		10 Bits	%AI Full Scale	32,000
Max Over Current		35 mA	Conversion Speed	Once per Ladder Scan
Max Error at 25°C (excluding zero)		4-20 mA 1.00% of FS 0-20 mA 1.00% of FS 0-10 VDC 1.50% of FS	Filtering	160 Hz hash (noise) filter 1-128 scan digital running average filter


J1 (Orange)	Name
I1	IN1
I2	IN2
I3	IN3
I4	IN4
I5	IN5
I6	IN6
I7	IN7
I8	IN8
H1	HSC1 / IN9
0V	Common
A1	Analog IN1
A2	Analog IN2
A3	Analog IN3
A4	Analog IN4
0V	Common

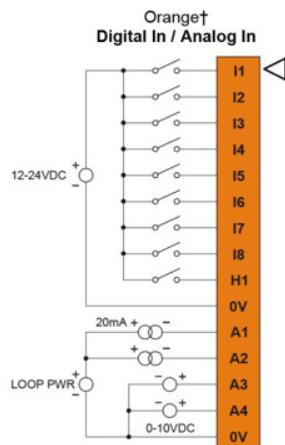

J2 (Black)	Name
C6	Relay 6 COM
R6	Relay 6 NO
C5	Relay 5 COM
R5	Relay 5 NO
C4	Relay 4 COM
R4	Relay 4 NO
C3	Relay 3 COM
R3	Relay 3 NO
C2	Relay 2 COM
R2	Relay 2 NO
C1	Relay 1 COM
R1	Relay 1 NO
H4	HSC4 / IN12
H3	HSC3 / IN11
H2	HSC2 / IN10

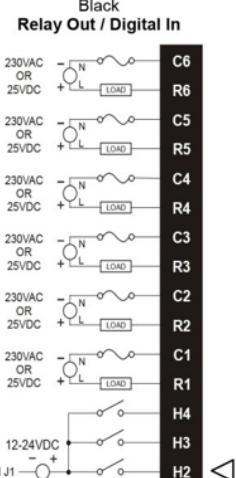

Model 2 Jumper Setting Details				
J1	JP2	JP1	J2	
JP1 Digital DC In / HSC Positive Logic	JP1 Digital DC In / HSC Negative Logic	JP2 Analog In (A1 – A4) Current (20 mA)	JP2 Analog In (A1 – A4) Voltage (10 V)	
Default	001XLE026	A1 A2 A3 A4	Default	
Location of I/O jumpers (JP1 & JP2) and wiring connectors (J1 and J2) with back cover removed.	Note: The Module Setup configuration must match the selected I/O (JP) jumper settings	Note: When using JP2 (A1-A4), each channel can be independently configured.		

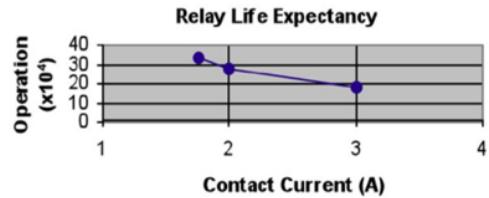

WARNING: EXPOSURE TO SOME CHEMICALS MAY DEGRADE THE SEALING PROPERTIES OF MATERIALS USED IN THE Tyco relay PCJ

Cover / case & base: Mitsubishi engineering Plastics Corp. 5010GN6-30 or 5010GN6-30 M8 (PBT)
Sealing Material: Kishimoto 4616-50K (1 part epoxy resin)


It is recommended to periodically inspect the relay for any degradation of properties and replace if degradation is found

i³CX Intelligent Control Station


10B04 & 20B05 I/O Board Specifications

Digital DC Inputs	10B04	20B05	Digital DC Outputs	10B04	20B05
Inputs per Module	12 including 4 configurable HSC inputs	24 including 4 configurable HSC inputs	Outputs per Module	12 including 2 configurable PWM outputs	16 including 2 configurable PWM outputs
Commons per Module	1		Commons per Module	1	
Input Voltage Range	10-30 VDC		Output Type	Sourcing / 10 K Pull-Down	
Absolute Max Voltage	35 VDC Max		Absolute Max Voltage	28 VDC Max	
Input Impedance	10 kΩ		Output Protection	Short Circuit	
Input Current	Positive Logic	Negative Logic	Max Output Current per Point	0.5 A	
Upper Threshold	0.8mA	-1.6mA	Max Total Current	4 A Continuous	
Lower Threshold	0.3mA	-2.1mA	Max Output Supply Voltage	30 VDC	
Max Upper Threshold	8 VDC		Min Output Supply Voltage	10 VDC	
Max Lower Threshold	3 VDC		Max Voltage Drop at Rated Current	0.25V	
OFF to ON Response	1 ms		Max Inrush Current	650 mA per channel	
ON to OFF Response	1 ms		Min Load	None	
HSC Max Switching Rate	500 KHz each		OFF to ON Response	1 ms	
ON to OFF Response	1 ms		Output Characteristics	Current Sourcing (Pos Logic)	



J1 (Orange)	Signal Name
I1	IN1
I2	IN2
I3	IN3
I4	IN4
I5	IN5
I6	IN6
I7	IN7
I8	IN8
H1	HSC1 / IN9
H2	HSC2 / IN10
H3	HSC3 / IN11
H4	HSC4 / IN12
A1	Analog IN1
A2	Analog IN2
0V	Common

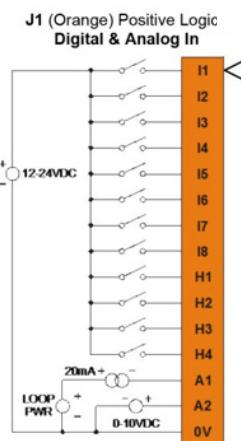


J3 (Orange)	20B05 Signal Name
I13	IN13
I14	IN14
I15	IN15
I16	IN16
I17	IN17
I18	IN18
I19	IN19
I20	IN20
I21	IN21
I22	IN22
I23	IN23
I24	IN24
0V	Common

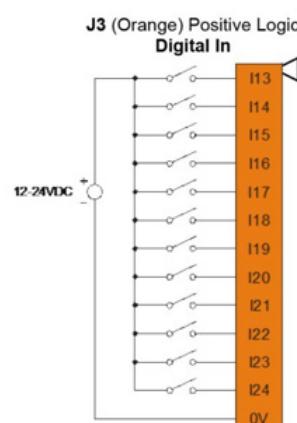

J2 (Black)	10B04	20B05
0V	Common	
V+	V+	
NC	No Connect	OUT13
Q12	OUT12	
Q11	OUT11	
Q10	OUT10	
Q9	OUT9	
Q8	OUT8	
Q7	OUT7	
Q6	OUT6	
Q5	OUT5	
Q4	OUT4	
Q3	OUT3	
Q2	OUT2 / PWM	
Q1	OUT1 / PWM	

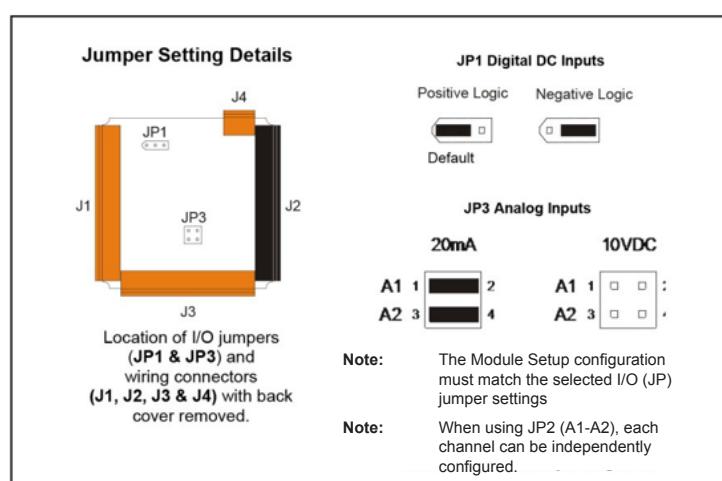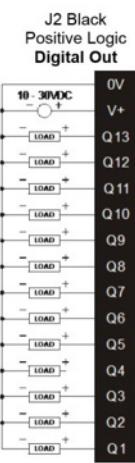

J4 (Orange)	20B05
Q16	OUT16
Q15	OUT15
Q14	OUT14



Note:
10B04 uses J1 and J2 only
20B05 uses J1, J2, J3 and J4

* Please refer to medium analog resolution specification in 10D03 I/O Board specification page


*i*³CX Intelligent Control Station

13C14 I/O Board Specifications


Digital DC Inputs			Digital DC Outputs	
Inputs per Module	12 including 4 configurable HSC inputs		Outputs per Module	12 including 2 configurable PWM outputs
Commons per Module	1		Commons per Module	6
Input Voltage Range	10-30 VDC		Output Type	Sourcing / 10 K Pull-Down
Absolute Max Voltage	35 VDC Max		Absolute Max Voltage	28 VDC Max
Input Impedance	10 kΩ		Output Protection	Short Circuit
Input Current	<u>Positive Logic</u>	<u>Negative Logic</u>	Max Output Current per Point	0.5A
Upper Threshold	0.8mA	-1.6mA	Max Total Current	4 A Continuous
Lower Threshold	0.3mA	-2.1mA	Max Output Supply Voltage	30 VDC
Max Upper Threshold	8 VDC		Min Output Supply Voltage	10 VDC
Max Lower Threshold	3 VDC		Max Voltage Drop at Rated Current	0.25V
OFF to ON Response	1 ms		Max Inrush Current	650 mA per channel
ON to OFF Response	1 ms		Min Load	None
HSC Max Switching Rate	10 kHz Totalizer/Pulse, Edges 5 kHz Frequency/Pulse, Width 2.5 kHz Quadrature		OFF to ON Response	1 ms
			ON to OFF Response	1 ms
			Output Characteristics	Current Sourcing (Positive Logic)
Analog Inputs, High Resolution				
Number of Channels	2	Thermocouple	Temperature Range	
Input Ranges (Selectable)	0 - 10 VDC, 0 – 20 mA, 4 – 20 mA, 100mV PT100 RTD, and J, K, N, T, E, R, S, B Thermocouple	B / R / S E T J K / N	2912°F to 32.0°F (1600°C to 0°C) 1652°F to 328°F (900°C to -200°C) 752.0°F to -400°F (400°C to -240°C) 1382.0°F to -346.0°F (750°C to -210°C) 2498.0°F to -400°F (1370°C to -240°C)	
Nominal Resolution	10V, 20mA, 100mV: 14 Bits RTD, Thermocouple: 16 Bits	Thermocouple Common Mode Range	±10V	
Converter Type	Delta Sigma	Max Thermocouple Error	±0.2% (±0.3% below -100°C)	
Input Impedance (Clamped @ -0.5 VDC to 12 VDC)	Current Mode: 100 Ω, 35mA Max Continuous Voltage Mode: 500 kΩ, 35mA Max Continuous	Max Error at 25°C (*excluding zero)	4-20 mA *0-20 mA *0-10 VDC RTD (PT100) 0-100 mV	
AI Full Scale	10 V, 20 mA, 100 mV: 32,000 counts full scale. RTD / T/C: 20 counts / °C	Conversion Speed, Both Channels Converted	10V, 20mA, 100mV: 30 Times/Second RTD, Thermocouple: 7.5 Times/Second	
Max Over-Current	35mA	Conversion Time per Channel	10V, 20mA, 100mV: 16.7mS RTD, Thermocouple: 66.7mS	
Open Thermocouple Detect Current	50 nA	RTD Excitation Current	250 μA	

***i*³CX Intelligent Control Station**




J1 (Orange)	Name
I1	IN1
I2	IN2
I3	IN3
I4	IN4
I5	IN5
I6	IN6
I7	IN7
I8	IN8
H1	HSC1 / IN9
H2	HSC2 / IN10
H3	HSC3 / IN11
H4	HSC4 / IN12
NC	No Connect
NC	No Connect
0V	Common

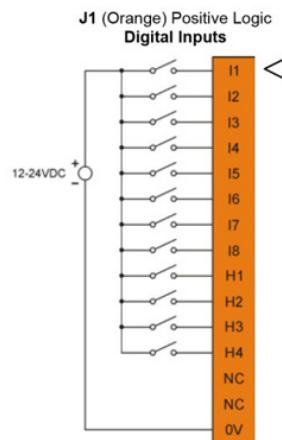

J2 (Black)	Name
OV	Common
V+	Output Power
NC	No Connect
Q12	OUT12
Q11	OUT11
Q10	OUT10
Q9	OUT9
Q8	OUT8
Q7	OUT7
Q6	OUT6
Q5	OUT5
Q4	OUT4
Q3	OUT3
Q2	OUT2 / PWM2
Q1	OUT1 PWM1

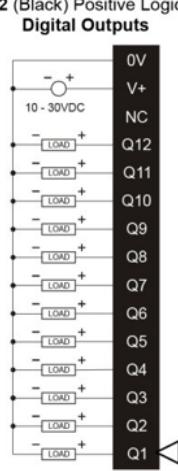


J3 (Orange)	Name
T1+	TC (1+) or RTD (1+) or 100mV (1+)
T1-	TC (1-) or RTD (1-) or 100mV (1-)
T2+	TC (2+) or RTD (2+) or 100mV (2+)
T2-	TC (2-) or RTD (2-) or 100mV (2-)
AQ1	10V or 20mA Out (1)
AQ2	10V or 20mA Out (2)
0V	Common
MA1	0-20mA In (1)
V1	0-10V In (1)
0V	Common
MA2	0-20mA In (2)
V2	0-10V In (2)
0V	Common

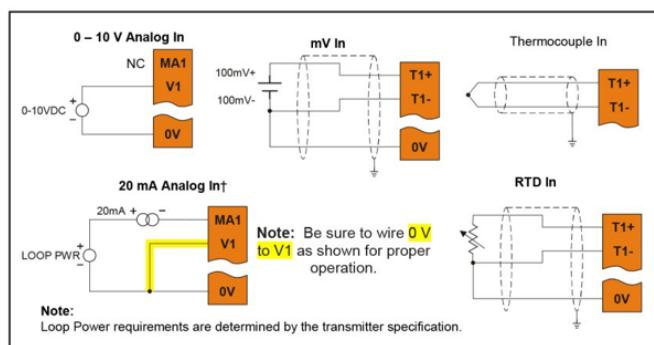

Location of I/O jumpers (JP1-JP4) and
wiring connectors (J1-J4)
with back cover removed.

Jumper Setting Details



JP4

**ANALOG OUTPUT SETTING
VOLTAGE OR CURRENT**

CURRENT (20mA) 	VOLTAGE (10V) 
AQ2 AQ1	AQ2 AQ1


Default

i³CX Intelligent Control Station


10E24 I/O Board Specifications

Digital DC Inputs			Digital DC Outputs	
Inputs per Module	12		Outputs per Module	12
Commons per Module	1		Commons per Module	1
Input Voltage Range	10-30 VDC		Output Type	Sourcing / 10 K Pull-Down
Absolute Max Voltage	35 VDC Max		Absolute Max Voltage	30 VD Max
Input Impedance	10 kΩ		Output Protection	Short Circuit & Ovvoltage
Input Current	<u>Positive Logic</u>	<u>Negative Logic</u>	Max Output Current per Point	0.5A
Upper Threshold	0.8mA	-1.6mA	Max Total Current per driver	2 A Continuous
Lower Threshold	0.3mA	-2.1mA	Max Output Supply Voltage	30 VDC
Min "On" Input	8 VDC		Min Output Supply Voltage	10 VDC
Max "Off" Input	3 VDC		Max Voltage Drop at Related Current	0.25 VDC
Galvanic Isolation	None		I/O Indication	None
OFF to ON Response	1 ms		Galvanic Isolation	None
ON to OFF Response	1 ms		Min Load	None
Logic Polarity	Positive and Negative based on Common pin level.		OFF to ON Response	150 ns
I/O Indication	None		ON to OFF Response	150 ns
High Speed Counter Inputs	4 - DIN 8-12		PWM Out	500KHz
High Speed Counter Max Freq	500KHz		Output Characteristics	Current Sourcing (Positive Logic)
Connector Type	3.5mm Pluggable cage clamp connector			
Analog Inputs, High Resolution				
Number of Channels	6		Absolute Max Input Voltage	-0.5 to 12V DC
Input Range	0-20mA, 4-20 mA dc. 0-60mV, 0-10V dc. TC - J, K, N, T, E, R, S, B RTD - PT100, PT1000		Input Impedance (Clamped @ -0.5 to 10.23VDC).	TC / RTD / mV > 2 MΩ mA: 15 Ω + 1.5 V V: 1.1 MΩ
Nominal Resolution	14 - 17 Bits (variable depending on input type)		Galvanic Isolation	None
Sensor Range and Accuracy		Input Type	Range	Accuracy
		TC J	-120 to 1000°C / -184 to 1832°F	± 0.2% FS ± 1°C
		TC K	-130 to 1372°C / -202 to 2501.6°F	± 0.2% FS ± 1°C
		TC T	-130 to 400°C / -202 to 752°F	± 0.2% FS ± 1°C
		TC E	-130 to 780°C / -202 to 1436°F	± 0.2% FS ± 1°C
		TC N	-130 to 1300°C / -202 to 2372°F	± 0.2% FS ± 1°C
		TC R, S	20 to 1768°C / 68 to 3214.4°F	± 0.2% FS ± 3°C
		TC B	100 to 1820°C / 212 to 3308°F	± 0.2% FS ± 3°C
		PT100/1000	-200 to 850°C / -328 to 1562°F	± 0.15% FS
		0-20mA	0-20mA	± 0.15% FS
		0-60mV	0-60mV	± 0.15% FS
		0-10V	0-10V	± 0.15% FS
Conversion Speed	Minimum all channels converted in approx. 150mS			
Analog Outputs				
Number of Channels	4		Minimum Current Load	500Ω
Output Ranges	0-10VDC, 0-20mA, 4-20mA		Galvanic Isolation	None
Nominal Resolution	12 Bits		Conversion Speed	Min all channels once per scan
Response Time	One update per ladder scan			
Max Error at 25°C (excluding zero)	0-20mA	0.1% of FS	Additional Error for temperatures other than 25°C	20mA 0.0126%/°C
	0-10V	0.1% of FS		


*³*CX Intelligent Control Station

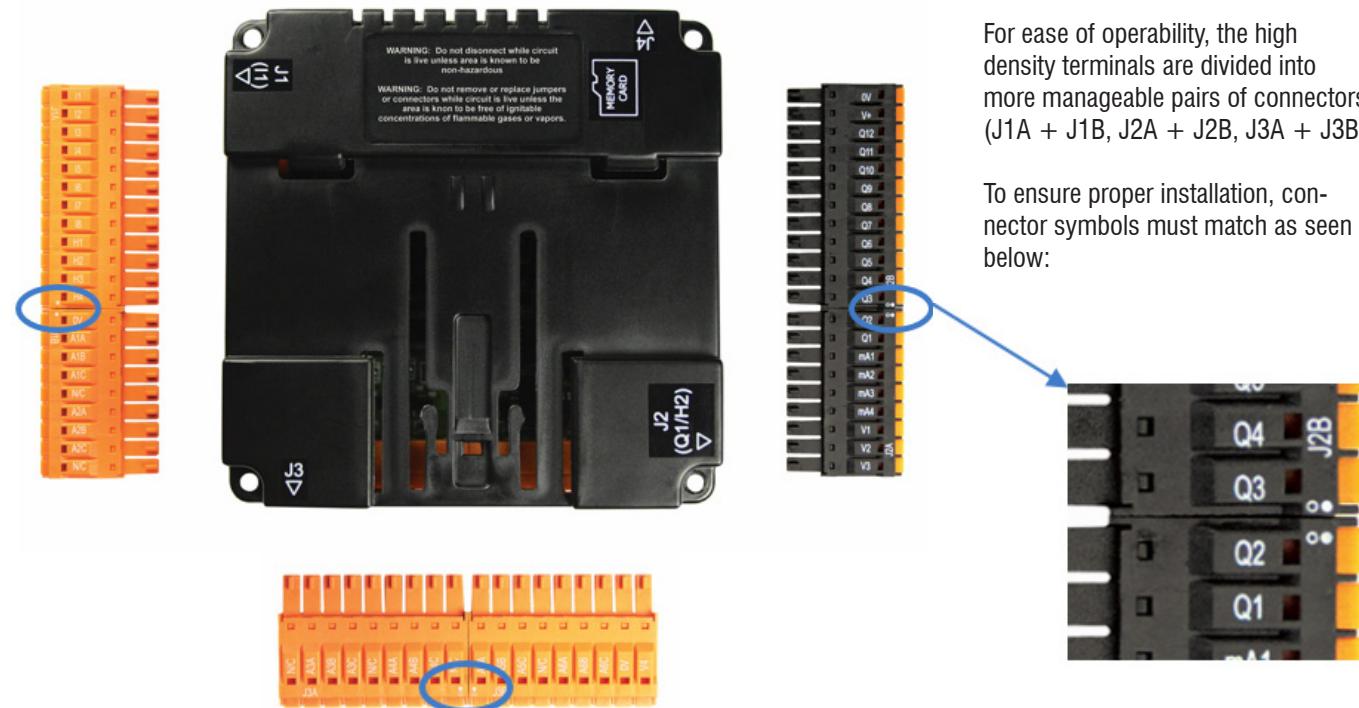



J1 (Orange/Green)		Signal Name
J1A	I1	V IN1
	I2	V IN2
	I3	V IN3
	I4	V IN4
	I5	V IN5
	I6	V IN6
	I7	V IN7
	I8	V IN8
	H1	HSC1 / V IN9
	H2	HSC2 / V IN10
	H3	HSC3 / V IN11
	H4	HSC4 / V IN12
	0V	Common
J1B	A1A	Univ. AI 1 pin 1
	A1B	Univ. AI 1 pin 2
	A1C	Univ. AI 1 pin 3
	NC	No Connect
	A2A	Univ. AI 2 pin 1
	A2B	Univ. AI 2 pin 2
	A2C	Univ. AI 2 pin 3
	NC	No Connect

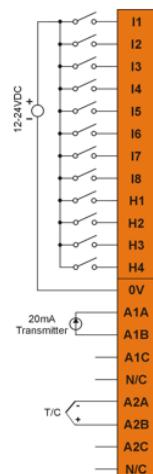

J3 (Orange/Green)		Signal Name
Univ. AI	I1	NC
	I2	No Connect
	I3	A3A
	I4	Univ. AI 3 pin 1
	I5	A3B
	I6	Univ. AI 3 pin 2
	I7	A3C
	I8	Univ. AI 3 pin 3
	H1	NC
	H2	No Connect
	H3	A4A
	H4	Univ. AI 4 pin 1
	0V	A4B
	A1A	Univ. AI 4 pin 2
	A1B	A4C
	A1C	Univ. AI 4 pin 3
	N/C	NC
	A2A	No Connect
	A2B	A5A
	A2C	Univ. AI 5 pin 1
	NC	A5B
		Univ. AI 5 pin 2
		A5C
		Univ. AI 5 pin 3
		NC
		No Connect
		A6A
		Univ. AI 6 pin 1
		A6B
		Univ. AI 6 pin 2
		A6C
		Univ. AI 6 pin 3
		NC
		No Connect
		V4
		V OUT4*

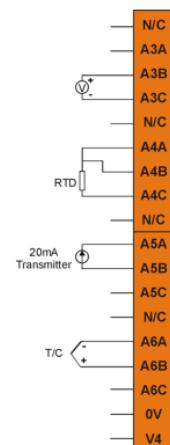


J2 (Black/Green)		Signal Name
2A	V3	V OUT 3*
	V2	V OUT 2*
	V1	V OUT 1*
	mA4	mA Out 4*
	mA3	mA Out 3*
	mA2	mA Out 2*
	mA1	mA Out 1*
	Q1	OUT 1 / PWM1
	Q2	OUT 2 / PWM2
	Q3	OUT 3
	Q4	OUT 4
	Q5	OUT 5
	Q6	OUT 6
	Q7	OUT 7
	Q8	OUT 8
	Q9	OUT 9
	Q10	OUT 10
	Q11	OUT 11
	Q12	OUT 12
	V+	V External+
	0V	Common

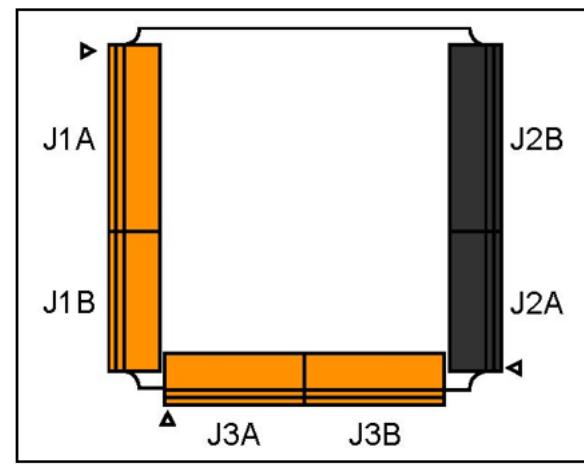

Note * Both mA & V outputs are active for each output channel, however, only the configured output type is calibrated (maximum 4 channels simultaneously).

Example of Universal Input Wiring Schematic

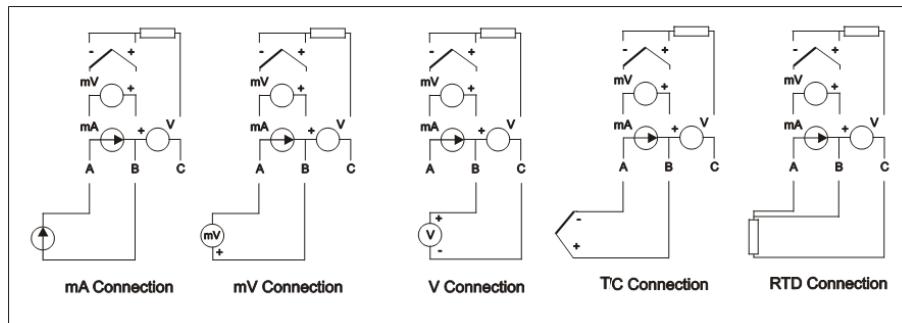

Configuration

The data registers as follows:-

Digital Inputs	Digital Outputs	Analog Inputs	Analog Outputs
%I1-12	%Q1-12	%AI1-4, %AI33-38	%AQ9-12

Note: The first four analog inputs are mapped to both %AI1-4 and %AI33-36, analogue input channels 5 & 6 are mapped to %AI37 and %AI38 respectively only.

Data Values

The analogue inputs return data types as follows:-

Input Mode	Data Format	Comment
0-20mA, 4-20mA	0-32000	
0-10V, 0-60mV	0-32000	
TC, RTD	Temperature in °C or °F to 1 decimal place xxx.y	°C or °F may be selected in the I/O config section. The value is an integer, the user should divide by 10.

Status Register

Register	Descriptions							
%R1	Bit-wise status register enable – R1.1 – R1.9 enable for registers R2 to R9							
%R2	Firmware version							
%R3	Watchdog count – cleared on power-up.							
%R4	Status bits -		16..4	3	2	1		
			Reserved	Normal	Config	Calibration		
%R5	Scan rate of the 10E24 board (average) in units of 100µS.							
%R6	Scan rate of the 10E24 board (max) in units of 100µS.							
%R7	Channel Status	Channel 2	Channel 1					
	8	7	6	5	4	3	2	1
	Open RTD	Out of Limits	Shorted RTD	Open TC	Open RTD	Out of Limits	Shorted RTD	Open TC
%R8	Channel Status	Channel 4	Channel 3					
	8	7	6	5	4	3	2	1
	Open RTD	Out of Limits	Shorted RTD	Open TC	Open RTD	Out of Limits	Shorted RTD	Open TC
%R9	Channel Status	Channel 6	Channel 5					
	8	7	6	5	4	3	2	1
	Open RTD	Out of Limits	Shorted RTD	Open TC	Open RTD	Out of Limits	Shorted RTD	Open TC
%R10-14	Reserved							

Note: For the purposes of the example, the block is shown starting at %R1, but it can be set to anywhere in the %R memory map.

Safety

WARNING: Battery may explode if mistreated. Do not recharge, disassemble or dispose of in fire.

WARNING: EXPLOSION HAZARD - BATTERIES MUST ONLY BE CHANGED IN AN AREA KNOWN TO BE NON-HAZARDOUS

This equipment is suitable for use in Class 1, Division 2, Groups A, B, C and D or Non-hazardous locations only.

FOR U.S. & CANADA ONLY

Power input and output (I/O) wiring must be in accordance with Class 1, Division 2 wiring methods of the National Electric Code, NFPA70 for installations in the U.S. or as specified in Section 18-1J2 of the Canadian Electric Code for installations within Canada and in accordance with the authority having jurisdiction.

WARNING: EXPLOSION HAZARD - Do not disconnect equipment unless power has been switched off or the area is known to be non-hazardous.

WARNING: EXPLOSION HAZARD - Substitution of components may impair suitability for Class 1, Division 2.

Digital outputs shall be supplied from the same source as the i3 Controller.

WARNING: Only qualified electrical personnel familiar with the construction and operation of this equipment and the hazards involved should install, adjust, operate, or service this equipment. Read and understand this manual and other applicable manuals in their entirety before proceeding. Failure to observe this precaution could result in severe bodily injury or loss of life.

WARNING: To avoid the risk of electric shock or burns, always connects the earth ground before making any other connections.

WARNING: To reduce the risk of fire, electrical shock, or physical injury it is strongly recommended to fuse all Power Sources connected to the i3 controller. Be sure to locate fuses as close to the source as possible.

WARNING: Replace fuse with the same type and rating to provide protection against risk of fire and shock hazards.

WARNING: In the event of repeated failure, do not replace the fuse again as a repeated failure indicates a defective condition that will not clear by replacing the fuse.

Jumpers on connector JP1 and others shall not be removed or replaced while the circuit is live unless the area is known to be free of ignitable concentrations of flammable gases or vapours.

Common Cause of Analog Input Tranzorb Failure

If a 4-20mA circuit is initially wired with loop power, but without a load, the Analog Input could see 24VDC. This is higher than the rating of the tranzorb. This can be solved by NOT connecting loop power prior to load connection, or by installing a low-cost PTC in series between the load and Analog Input.

