

i³E Intelligent Control Station



- 7" TFT Colour Touchscreen
- 65,535 Colours, WVGA(800 x 480)
- MicroSD™ Data storage upto 32GB
- Real Time Clock
- 2 CAN Port, 3 RS 232/RS 485
- 10 - 30 VDC Power Supply
- 2 Built in Ethernet Port
- Free Configuration Software
- USB Port for Programming
- USB Port for Flash Drives upto 2TB
- Remote IO Communication
- Optional: Modem (SMS, GSM,GPRS)
- Online Programming

General Specification


Required Power (Steady State)	170 mA @ 24 VDC
Primary Voltage Range	10 – 30 VDC
Relative Humidity	5 to 95% Non-condensing
Clock Accuracy	+/-20 ppm maximum at 25°C (+/-1 Minutes per Month)
Operating Temperature	-10°C to + 60°C
Storage Temperature	-30°C to 70 °C
Display Type	7" WVGA TFT Transmissive colour
Screen Resolution	800 x 480
Colours	65535 (16 Bit)
Screen & Program Memory	27MB & 1MB
Scan Rate	Controller 0.013ms/k
Display Life	LED, Min 50000 Hours
User Keys	5 User defined Function Keys
User Programmable Screen	1023
Weight	2 lb (907g.)
Approvals	CE, UL
Terminal Type	Screw Type, 5mm Removable



Options & Ordering Codes

Standard Options	DI	DO	AI	AO
i3E14Z/00000-SEHF	-	-	-	-
i3E14Z/10B04-SEHF	12	12	2	-
i3E14Z/10D03-SEHF	12	6 Relay	4	-
i3E14Z/13C14-SEHF	12	12	2*	2
i3E14Z/20B05-SEHF	24	16	2	-

* 2 Universal High resolution Analogue Inputs for V/mA/TC/RTD

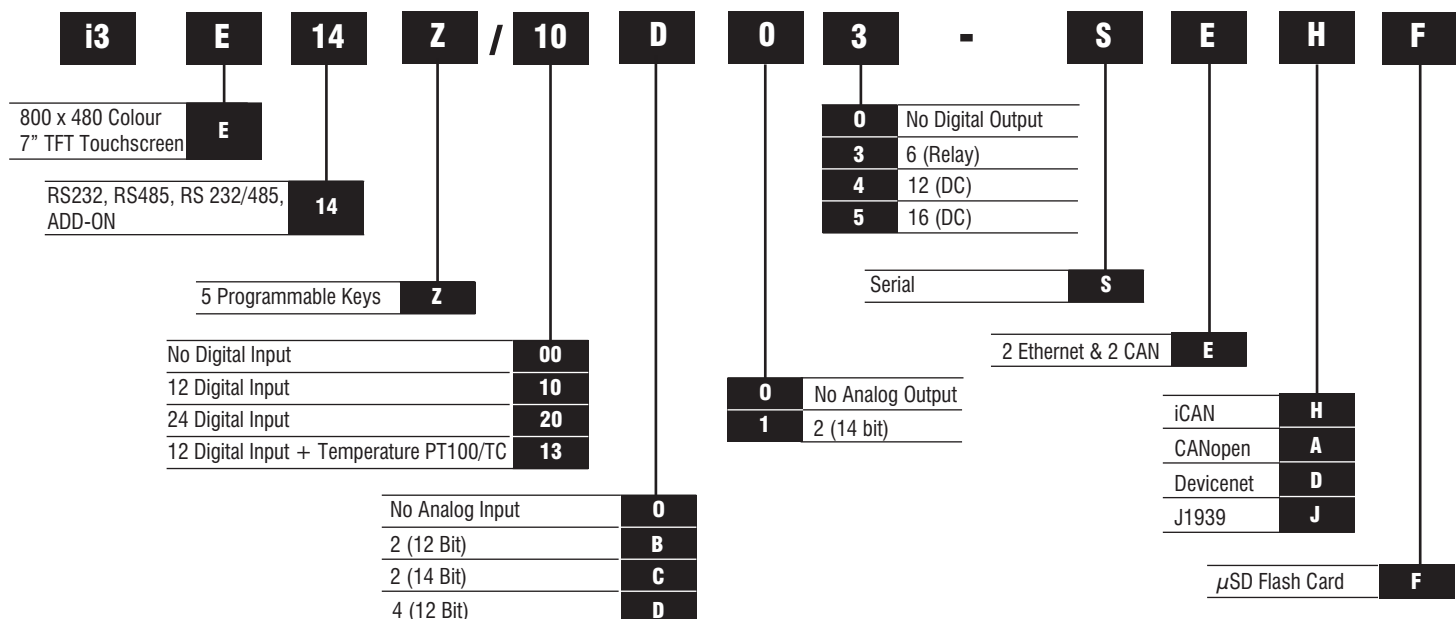

Technical Specifications

Digital DC Inputs		
Input Voltage Range	12VDC-24VDC	
Absolute Max. Voltage	35 VDC Max.	
Input Impedance	10k Ω	
Input Current	Positive Logic	Negative Logic
Upper Threshold	0.8 mA	-1.6 mA
Lower Threshold	0.3 mA	-2.1 mA
Max Upper Threshold	8 VDC	
Min Lower Threshold	3 VDC	
Time Response Off - On/On - Off	1 mS	
HSC Max. Switching Rate	Up to 500kHz each - 2 Nos.	

Digital Outputs	
Output Type	Sourcing / 10K Pull Down
Absolute Max. Voltage	28VDC Max
Output Protection	Short Circuit
Max. Output Current Per Point	0.5A
Max. Total Current	4A Continuous
Max. Output Supply Voltage	30VDC
Minimum Output Supply Voltage	10VDC
Max. Voltage Drop at Rated Current	0.25VDC
Max. Inrush Current	650mA Per Channel
OFF to ON / ON to OFF response	1mS
Output Characteristics	Current Sourcing (Positive Logic)
Pulse Output Frequency	65kHz

Analogue Inputs - Medium Resolution

Input Ranges	0 - 10VDC
	0 - 20mA
	4 - 20mA
Safe input voltage range	-0.5V to +12V
Input Impedance (Clamped @ -0.5VDC to 12VDC)	Current Mode: 100 Ω Voltage Mode: 500K Ω
Nominal Resolution	12 Bits
%AI full scale	32,000 counts
Max. Over-Current	35mA
Max. Error at 25°C 4-20mA	1.00%
Max. Error at 25°C 0-20mA	1.00%
Max. Error at 25°C 0-10VDC	1.50%
Filtering	160Hz Hash Noise Filter
Additional Error for temperatures other than 25°C	TBD

Control & Logic Specification

Online Programming	Supported in advanced ladder logic
I/O Support	Digital Input - 2048
	Digital Output - 2048
	Analogue Input - 512
	Analogue Output - 512
Registers	R - 50000 Words
	M - 16384 Bits
	T - 16384 Bits

Digital Relay Outputs	
Max. Output Current per Relay	3A at 250 VAC, resistive
Max. Total Output Current	5A continuous
Max. Output Voltage	275 VAC, 30 VDC
Max. Switched Power	1250VA, 150W
Contact Isolation to i3 ground	1000VAC
Max. Voltage Drop at Rated Current	0.5V
Expected Life at No load	5,000,000
At Rated load	100,000
Max. Switching Rate at no load	300 CPM
At rated load	20 CPM
Type	Mechanical Contact
Response Time	One update per ladder scan plus 10ms

Analogue Outputs

Output Range	0-10V, 0-20mA
Nominal Resolution	14 bits
Maximum Load at 20mA	500 Ω
Minimum Load at 10V	1000 Ω
Maximum Error at 25°C	0.10%
Additional Error for temperatures other than 25°C	0.01%/°C

Analogue Inputs - High Resolution

Input Ranges	0 - 10VDC
	0 - 20mA
	100mV
	4 - 20mA
	J,K,N,T,E,R,S,B Thermocouples PT100 RTD
Safe input voltage range	10VDC: -0.5V to +15V 20mA: -0.5V to +6V RTD/TC: +/- 24VDC
Nominal Resolution	10V, 20mA, 100mV: 14 Bits RTD, Thermocouples: 16 Bits
Input Impedance	Current Mode: 100 Ω , 35mA Max Voltage Mode: 500k Ω , 35mA Max
%AI full scale	10V, 20mA, 100mV-32,000 counts full scale RTD/TC: 20 counts / °C
Max. Over-Current	35mA
Open Thermocouple Detect Current	50nA
Thermocouple Temp. range: B/R/S	2912°F to 32°F (1600°C to 0°C)
E	1652°F to -328°F (900°C to -200°C)
T	752°F to -400°F (400°C to -240°C)
J	1382°F to -346°F (750°C to -210°C)
K/N	2498°F to -400°F (1370°C to -240°C)
Thermocouple Common Mode Range	+/-10V
Max. Error at 25°C (4(0)-20mA, 0-10VDC)	+/-0.1%
Max. Error at 25°C PT100	+/-1.0°C
Max. Error at 25°C 0-100mV	+/-0.05%
Max. Error after 1Hr Warmup TC	+/- 0.2%
Conversion speed both channel converted	10V, 20mA, 100mV: 30 Times / Second RTD, Thermocouple: 7.5 Times/ Second
Conversion speed both channel converted	10V, 20mA, 100mV: 16.7ms RTD, Thermocouple: 66.7ms
RTD Excitation Current	250mA

Communication Ports

MJ1 Serial Port Pin Assignments

Pin	Signal	Signal Description
8	TXD	RS-232 Transmit Data
7	RXD	RS-232 Receive Data
6	0V	Ground
5	+5V	+5 VDC 60 mA max
4	RTS	RS-232 Request to Send
3	CTS	RS-232 Clear to Send
2	-	-
1	-	-

Communication Ports

MJ2 Serial Port Pin Assignments


Pin	Signal	Signal Description
8	-	-
7	-	-
6	0V	Ground
5	+5V	+5 VDC 60 mA max
4	-	-
3	-	-
2	RX/TX-	RS-485 Rx/Tx Negative
1	RX/TX+	RS-485 Rx/Tx Positive

Communication Ports

MJ3 Serial Port Pin Assignments



Pin	Signal	Signal Description
8	TXD	RS-232 Transmit Data
7	RXD	RS-232 Receive Data
6	0V	Ground
5	+5	+5 VDC 60 mA max
4	TX-	RS-485 Transmit Negative
3	TX+	RS-485 Transmit Positive
2	RX-	RS-485 Receive Negative
1	RX+	RS-485 Receive Positive

DIP Switches

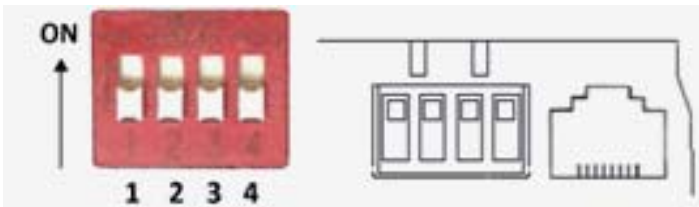


Switch	Name	Function	Default
1	MJ3 RS485 Termination	ON = Terminated	OFF
2	MJ3 DUPLEX	ON = Half	OFF
3		OFF = Full	
4	MJ2 RS485 Termination	ON = Terminated	OFF

Dimension

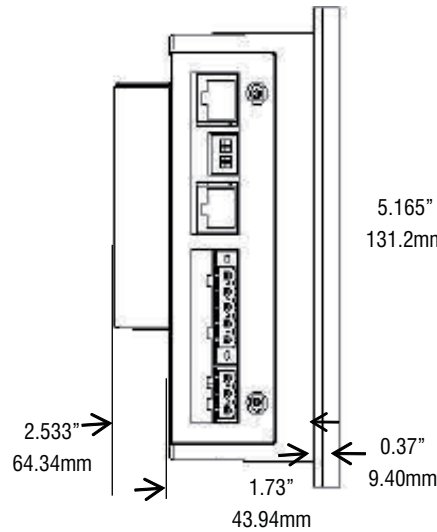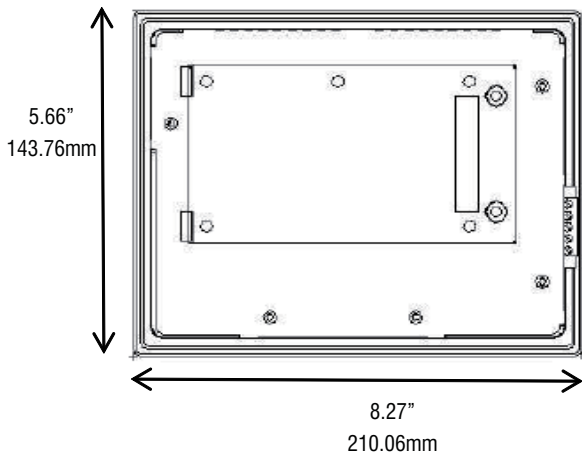

Cut Out Details

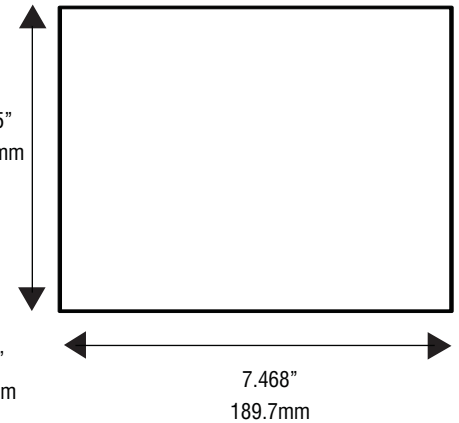

Accessory Products

1. Communication Cable: RS 232 Serial Communication Cable for programming and i3 Controllers, Part No. i3PC45.



2. IP65 RJ45 Panel Mounted Socket: Brings either MJ1 or MJ2 ports outside by installing this into a 22.5mm cut out, Part No. i3PAD.



3. USB to RS232 Converter for PC's without a serial Com port to communicate with the controllers, Part No. PC501.



Add - ins

1. GSM Modem Expansion Card - Send and receive SMS messages via the i3, dial up connection over GSM data link for remote programming, debugging etc. Or use a GPRS always-on data connection ideal for programming, debugging, monitoring and connection to a SCADA package for constant data logging and remote control, Part No. i3M.



2. ODIN OPC SERVER with LOKI Data Logger - ODIN can be used with LOKI to log either to an excel spreadsheet or an access database, with no tag limit and 30+ protocols to choose from (including IMO products, Mitsubishi, Allen Bradley and Siemens), Part No. IMO-OPC-Server.



3. Panel Point SCADA Lite - A powerful graphical editor, and a VB-based scripting language. Panel Point allows a PC to become the central data hub of an application, with no tag limit and 30+ protocols to choose from (including IMO products, Mitsubishi, Allen Bradley, Siemens), Part No. PANELPOINT (Developer) - Part No. PANELPOINT (Runtime)



4. i3Portal is a low-cost, powerful Windows® based software application that will allow to view and access remote i3 controllers via PC, Part No: i3-Transfer



5. i3-Transfer is a low-cost, powerful Windows® based software application that allows to easily transfer files between PC and remote i3 controllers, Part No: i3-Transfer

