


Sensor Connector Leads



- M12 and M8 connectors moulded to black cable
- IP67 Seal
- PVC and PUR standard range
- Optional other cable types (please contact IMO)
- Jumper leads
- Optional connector with LED indicator
- Quick sensor replacement to reduce down time
- Options with UL/cUL approval




Leads (Options and ordering codes)

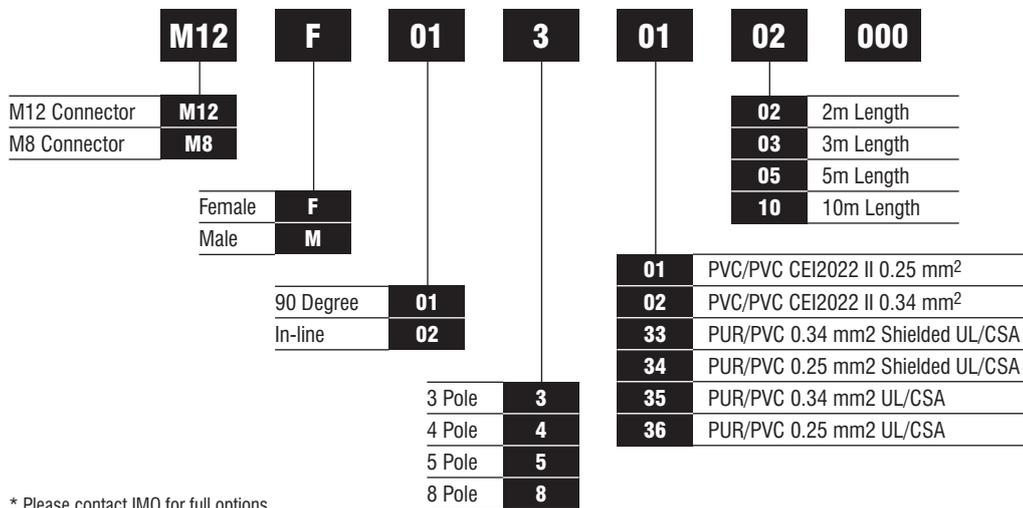

* Please contact IMO for full options

Jumper Leads (Options and ordering codes)

Please make your selection from the above options (do not include 000) then add suffix from the selection below:

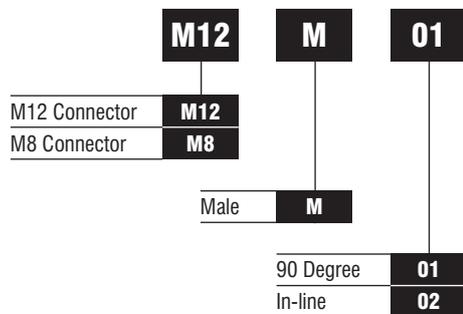



- Total flexibility in interconnection
- Field Attachable
- Panel Mount Solder Terminals
- Panel Mount with Flying Lead

Field Attachable Screw Terminals (Options and ordering codes)

M12	M	03	3		M8	F	04	3
M12 Connector	M12				M8 Connector	M8		
	Female	F		3 3 Pole		Female	F	3 3 Pole
	Male	M		4 4 Pole		Male	M	4 4 Pole
				5 5 Pole				
				8 8 Pole				
						Axial, PG7	04	
		90 Degree, PG7	03					
		Axial, PG7	04					
		90 Degree, PG11	05					
		Axial, PG11	06					

Panel Mount Connectors (Options and ordering codes)

M12	M	17	4
M12 Connector	M12		
	Female	F	4 4 Pole
	Male	M	5 5 Pole
			8 8 Pole
		Panel front mount PG9, solder	17
		Panel back mount PG9, solder	18
		Panel front mount PG9, PCB	19
		Panel back mount PG9, PCB	20

Panel Mount Connectors With Flying Lead (Options and ordering codes)

M12	F	17	4	01	02	00
M12 Connector	M12					
	Female	F			02 200mm Length	
	Male	M			05 500mm Length	
					06 600mm Length	
				01 PVC/PVC CEI2022 II 0.25 mm ²		
		Panel front mount PG9, solder	17	4 4 Pole		
		Panel back mount PG9, solder	18	5 5 Pole		
				8 8 Pole		