

Terminal Block Plug In 20.120M/xx-E

3.50mm Pitch, 300V 8A, Terminal Block Plug In, Black, Slot Head, Modular




Key Features

- 300V 8A
- UL94-V0
- PA66
- 3.50mm Pin Pitch
- Slot Head
- RoHS Compliant
- xx = Number of Poles (available 2~24 poles)
- Modular



Technical Data

Pitch	3.50mm
UL Rating	300V 8A
IEC Rating	250V 8A
Solder Pin	n/a
Wire Clamp	Copper Alloy, Nickel plated
Wire Range	28~16 AWG (1.0 mm ²)
PCB Hole Diameter	n/a
Stripping Length	5~6mm
Screw	Slot Head
Screw Type	M2.0 Steel (Zinc Plated)
Screw Torque	0.2 Nm (1.7lb/in)
Insulation Voltage	AC 2000V/1 Min
Initial Contact Resistance	20mΩ
Insulation Resistance	500MΩ / DC500V
Temperature Range	-40 to +105°C
Max Soldering	n/a

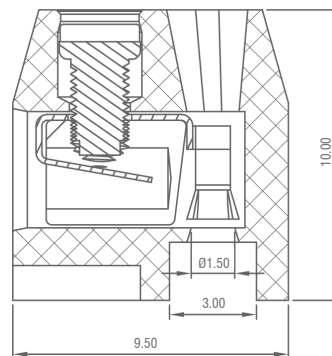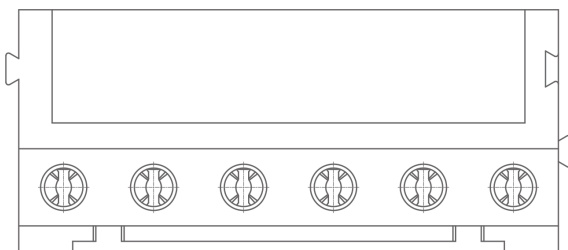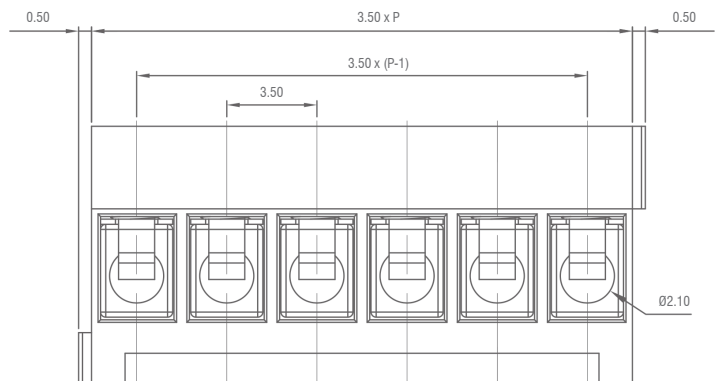

Dimensions shown in mm P = No of Poles

Supplied in black as standard

Other colour options and printing may be available depending upon quantity

Please contact IMO for further information