

XGB Programmable Logic Controller DC Input Expansion Unit


General Specifications

Item	XBE-DC08A	XBE-DC16B	XBE-DC32A
Input Points	8 Point	16 Point	32 Point
Rated Input Voltage	DC 24V	DC 12-24V	DC 24V
Rated Input Current	4mA		
Input Resistance	5.6KΩ		
Insulation Pressure	AC 560Vrms / 3 Cycle (altitude 2000m)		
Insulation Resistance	10MΩ or more by Megger		
Operation Voltage Range	A type: 20.4-28.8VDC, B type: 9.5-30VDC (ripple rate < 5%)		
Common Method	8 Point / COM	16 Point / COM	32 Point / COM
Response Time	OFF → ON		
	ON → OFF		
Internal Current Consumption	30mA	40mA	50mA



Wiring

8 Point DC Input
XBE-DC08A

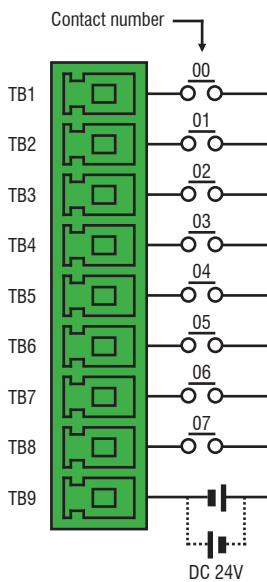

16 Point DC Input
XBE-DC16B

